MAGNER75.qxd 6/5/2007 1:42 PM Page 1

MAGNER®

75 Series

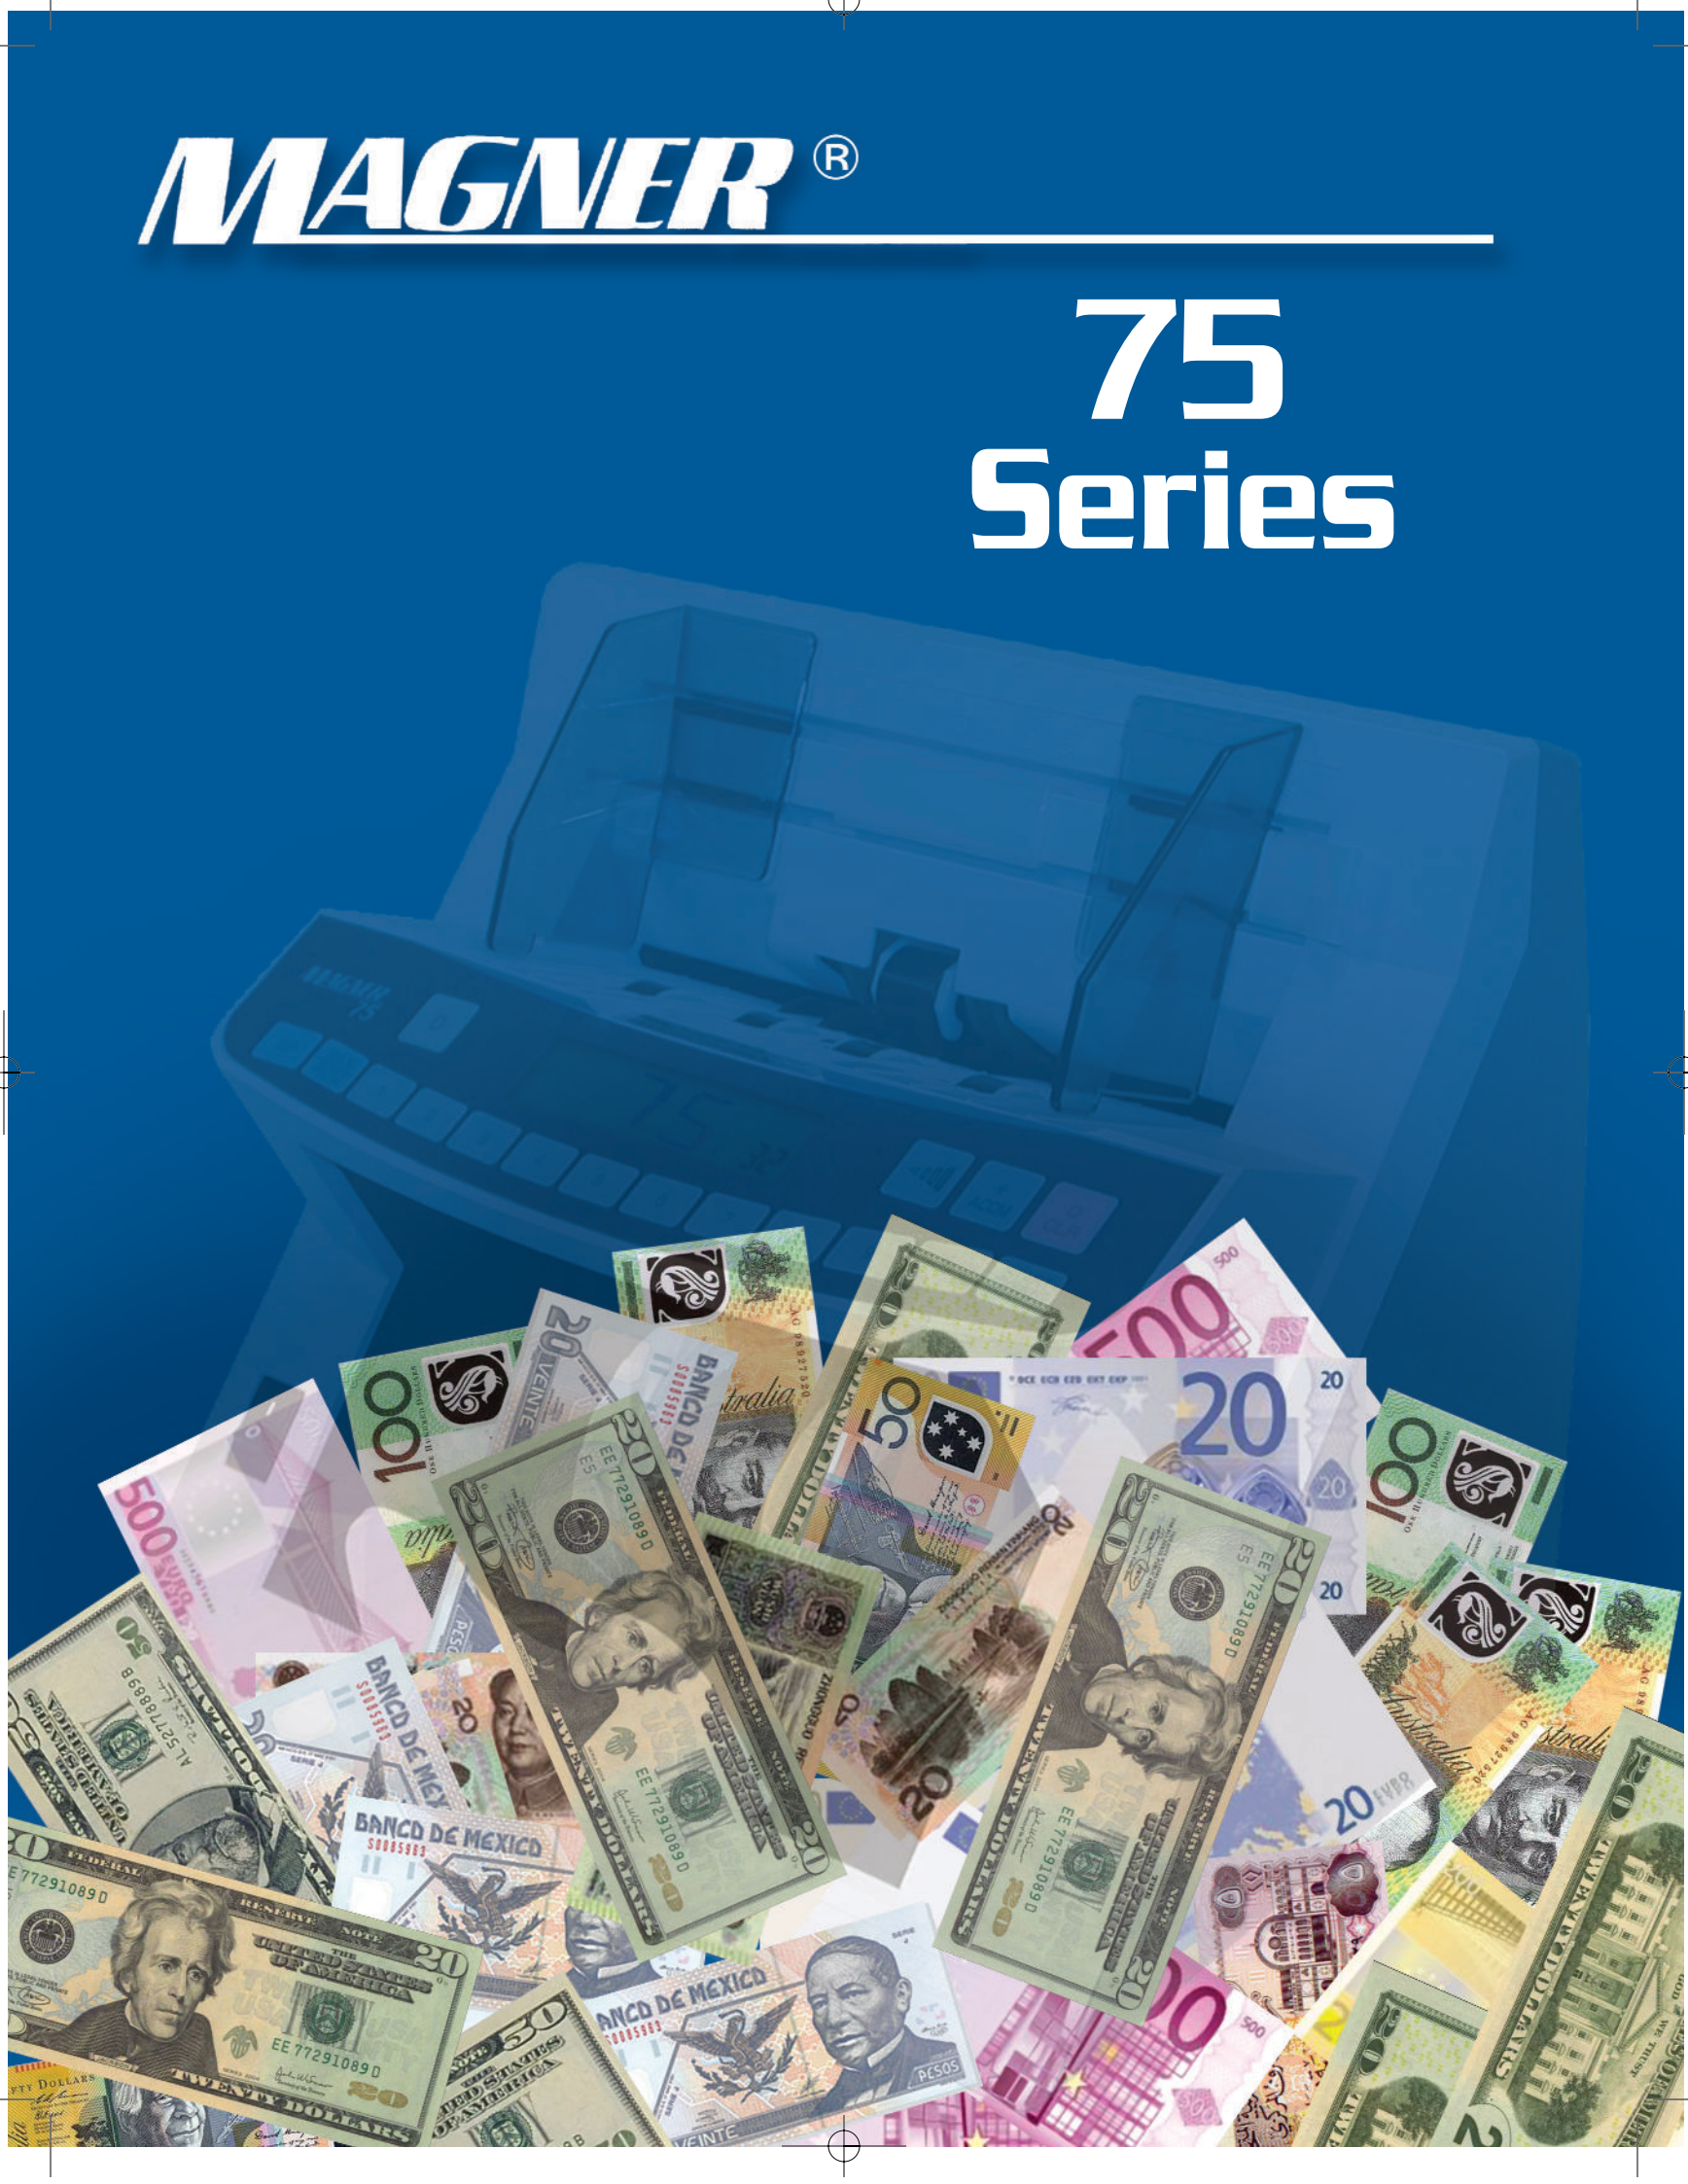

MAGNER75.qxd 6/5/2007 1:42 PM Page 2

MAGNER® 75 Series

The 75 Series Currency Counters offer performance and productivity over a wide range of applications. Choose from a basic model with variable batching to the most advanced and versatile operational product of them all: value counting of almost any currency with accurate detection of forgeries. The V-version models are capable of extending the value of currency denominations and tracking totals at the denomination, batch, and grand levels. Equipped with an optional printer, the 75V version provides a detailed audit trail for improved control of cash counting and balancing operations.

Model Range:

75MD	75UMI	75SUM	75VUS
75UD	75S	75SUMI	75VUMS
75UMD	75SU	75VS	75VUMSI

*** TDA** (Thread Detection Aid) **ENTIRE Model Range Available with this option**

75 Series

(Standard 75D Shown below)

- **D** - Standard Length Detection
- **S** -3-D Size Detection
- **M** - Dual Head, Dual Threshold Magnetic Counterfeit Detection
- **V** - Value Extension
- **U** - Ultraviolet Counterfeit
- **I** - Infared Detection

MAGNER®

75 Series
Specifications

Counting Speeds:
600, 1200,and 1500 notes per minute (selectable)

Display Type: LCD
3 digit batch display
4 digit peice count display
(V-Type Models Display: LED as above plus 9 digit value total display)

Document Size Limits:
1.97 x 3.54" to 3.94 x 7.28"
50 x 90mm to 100 x 185 mm

Hopper Capacity:
500 circulated notes

Stacker Capacity: 150 notes

Batching: Variable 1 to 999 (also preset batches of 5, 10, 20, 25, 50, 100 notes and "off" on V-type models)

Error Detection:
Double, chain, half-note, jam (standard), Counterfeit suspect (optional)

Counterfeit Detection (optional):
Dual-head, dual-threshold
3-D size detection,
Magnetic detection,
Ultraviolet detection

Document Feed Mechanism:
Friction, Internittent roller type

Dimensions:
10.04" (H) x 11.02" (W) x 9.06" (D)
255 mm (H) x 280 mm (W) x 230 mm (D)

Net Weight:
15.50 lbs. (18.19 lbs. boxed)

Power Source:
120V 60Hz/230V 50Hz (switch selectable)

Power Consumption: 70W (avg.)

Temperature Limits:
Operating:
+32°F to +104°F (0°C to +40°C)
Storage:
-22°F to +185°F (-30°C to +85°C)

Density Settings:
Adjustable, 4 levels

Connection:
RJ45-type for external display
RJ45-type for RS232 interface

Other Options:
- External Display
- Vault management system interface software
- 40 column dot matrix printer (V-type models only)

CE

UL®

Magner International Corporation, 2901 SW 149th Avenue • Suite 100 • Miramar, FL 33027
Tel: (954) 342-6000 • Fax: (954) 342-6001 • E-mail:magner@magnerinternational.com • www.magnerinternational.com

Specifications are Subject to Change